


Anti-static Oil Roll

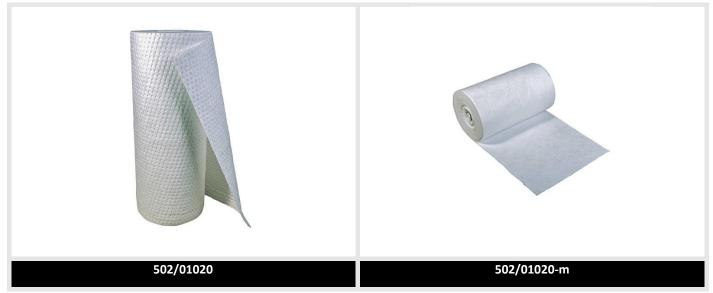

Sorbency: Lower figure test method to BS 7959-1:2004 using SAE10W40 motor oil. Higher figure based on high viscosity liquid with no drain.

Spill Kits Direct supply a range of anti-static products which absorb highly flammable liquids with no charge build up. Our rolls are hydrophobic and do not absorb water, they only absorb oil. They are manufactured from 100% Meltblown polypropylene for maximum absorbent capacity and retention with rapid capillary action. They are an excellent choice of product to use where flammable vapours are present as they safely dissipate static energy.

Suitable for	SKU C	ode	Size	Capacity Litres	Pack size	Pack weight
Hire fleet	502/01	1020	100cm x 42m	145 – 194	100 x 36 x 36 cm	3.7 kg
• Plant depot	502/010	020-m	50cm x 42m	73 - 97	50 x 36 x 36 cm	7.6kg
Composition: Meltblown >99.5% Polypropylene, <0.5% antistatic additive						
Compatibility:	Water-repellency exceeds requirements of BS 7959-2:2000. May be safely used with all liquids immiscible with water, such as hydrocarbons, solvents, mineral oils etc. Before any use in a spill situation a proper risk assessment should be carried out and all hazardous properties of the liquid or dangerous reactions taken into account.					
Fire resistance:	Good. (Physically flame-retardant) Incinerable to zero ash.					
Disposal:	Used sorbents may be disposed of by landfill or incineration, in accordance with local and national regulations, taking into account the classification of the liquid absorbed.					
Safety data:	This product is non-toxic to users and to aquatic life.					
Note:	All weights, dimensions, and other figures quoted are approximate.					

Revision Date 31/01/2018

