
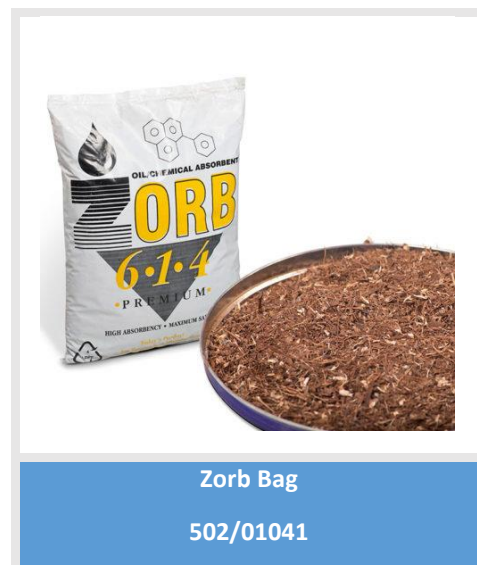


Zorb Oil Absorbent

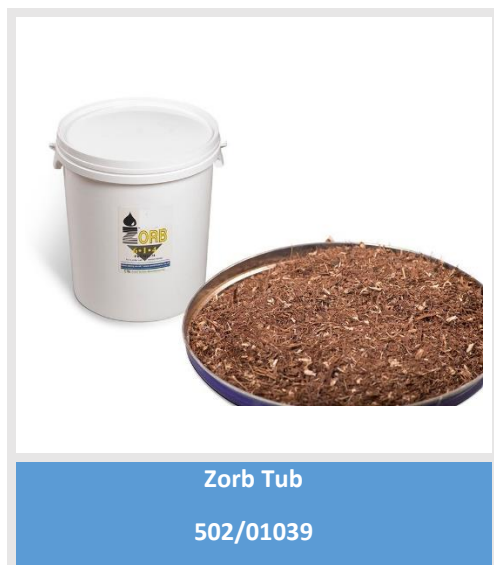

Zorb is up to six times more absorbent than traditional granules and excellent at retaining oil for disposal.

The unique structure of the raw material retains oil even in extreme conditions.

Zorb absorbs fuel oils, engine oils, paint, cutting oils, paraffin, anti-freeze, glycerines, and herbicides.

It is non-abrasive and will not mark or harm floors. It is naturally produced and

harvested renewal resource and provides an environmental solution to pollution.

It is suitable for use on both land and water.

Suitable for

- Indoor/outdoor use
- Settling ponds/waste-water lagoons
- Garage
- Fuel depot

SKU Code	Size	Pack Quantity	Absorbency Litres	Pack weight
502/01039	33 dia. x 30 cm	Tub	25 - 30	7.6kg
502/01041	50 x 35 x 10 cm	Polybag	25 - 30	6kg

Sorbency: Lower figure test method to BS 7959-1:2004 using SAE10W40 motor oil. Higher figure based on high viscosity liquid with no drain. Zorb also has reasonable absorbency for water and mild chemical solutions.

Composition:	100% Organic Harvested Softwood
Particle size	1 – 15mm (typical)
Compatibility:	May be safely used with non-aggressive aqueous solutions and liquids immiscible with water, such as hydrocarbons, solvents, mineral oils. Before any use in a spill situation a proper risk assessment should be carried out and all hazardous properties of the liquid or dangerous reactions taken into account.
Fire resistance:	Good, difficult to ignite – ignition temperature 235°C Incinerable to <2% ash
Disposal:	Used sorbents may be disposed of by landfill or incineration, in accordance with local and national regulations, considering the classification of the liquid absorbed.
Safety data:	This product is non-toxic to users and to aquatic life. Further technical advice is available if required.
Note:	All weights, dimensions, and other figures quoted are approximate.

Revision Date 06/08/2018